

### FreeStyle™ for a Speedy Recovery!

For busy medical laboratories, **FreeStyle™** Interlocking Environmental Flooring is just what the doctor ordered! By completely eliminating the need for any adhesive, it can be walked on immediately upon installation. **FreeStyle™** installs quickly and radically reduces the typical downtime and disruption found with conventional glue-down flooring products. And its flexible composition means it can be installed directly over old flooring! **FreeStyle™** has a durable wear layer made to handle heavy traffic. It's available in a large selection of attractive styles and is stain-resistant and anti-microbial. In medical laboratories **FreeStyle™** cures what ails your floors by offering:

#### Quick Installation

- Reduces Downtime
- Meets "Quick Build" Timelines
- No Need to Wait for New Concrete to Fully Cure
- Use Floor Immediately After Installation
- Easily Installed and Changed
- Damaged Tiles Can Be Changed Easily and Quickly

#### Durability to Match the Most Demanding Environments

- Waterproof, Anti-Microbial, Chemical & Stain-Resistant Composition
- Formulated for High Traffic and Commercial Use
- 10-Year Commercial Wear Through Warranty

#### Solves Problems


- Can Be Used Directly On Top of Old Flooring
- Covers High Moisture Concrete
- Eliminates Adhesive Failures and the Associated Costs and Worries

#### Resilient Construction for Safety and Comfort

- Reduces Noise
- Meets ADA Requirements for Slip Resistance
- Better Comfort Under Foot

#### Environmentally Preferred

- Made with 50% Recycled Materials, Including Post-Consumer Carpeting
- 100% Recyclable
- Portable for Re-use
- Interlocking to Eliminate the VOCs from Adhesives

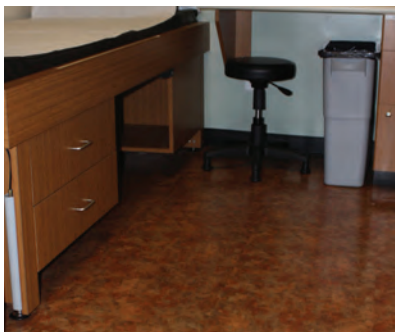

*At BC Biomedical, we make a commitment to deliver uncompromising service to our customers. **FreeStyle™** has helped us keep that commitment by installing quickly, resulting in less disruptions. We also strive to be a great place to work, and **FreeStyle™** helps there too, by being so comfortable to walk and stand on.*



### BC Biomedical



*When BC Biomedical Laboratories needed to replace their floor due to moisture failure, they needed a free-floating floor that would resist moisture, feel comfortable underfoot, and install quickly. **FreeStyle™** was exactly what they needed and has become their standard flooring for all installations directly on slab. And because **FreeStyle™** is available in a variety of colors and designs, it can be matched to the existing color scheme in each BC Biomedical location.*



# Freestyle Interlocking Flooring

## Limited 10-Year Warranty

FreeStyle™ is manufactured to provide a durable and long-lasting floor covering under a range of temperature and exposure conditions and is backed by a 10-Year Limited Warranty against wear. Ask your FreeStyle™ dealer for more details on this Limited 10-Year Warranty.

## Installation

FreeStyle™ is a 18.5" x 18.5" (2.38 sq. ft./tile) inter-locking floor tile. A plastic tipped mallet or deadhead hammer should be used for joining these products. Tiles can be cut using a utility knife, vinyl-tile cutter, or jig saw. FreeStyle™ is a free-lay system and does not require the use of adhesives. FreeStyle™ may be installed over concrete, wood, asbestos tile, rubber, vinyl, composite tiles, and other standard floors. A 3/8" gap around the perimeter should be left to allow for expansion and contraction. For more detailed instructions, consult the FreeStyle™ Installation Guide.

## Regular Maintenance

FreeStyle™ is easy to clean and maintain. The tiles can be cleaned with standard neutral cleansers or other acceptable cleansers. The tiles can be cleaned by hand using a mop or sponge. A power scrubber or buffer can also be used to clean particularly tough stains and soiling.

## Architectural Specifications


All floors shown in the Finish Schedule or listed in this specification shall be FreeStyle™ Resilient Flooring, manufactured by SelecTech, Inc. Avon, MA. The product shall be an interlocking floor tile and be available in 18.5" x 18.5" squares (nominal) and with a thickness of 0.375 inches. The product shall offer a 10-Year Limited Warranty against wear as detailed in the FreeStyle™ Warranty brochure. The tiles shall be installed as a free-lay product without adhesives. Installation shall be as recommended in the FreeStyle™ Installation Guide.

## For more information contact:

**SelecTech, Inc.**  
**33 Wales Ave, Unit F, Avon, MA 02322**  
**Phone: 508-583-3280**

Visit our website at [www.freestyleflooring.com](http://www.freestyleflooring.com)

## Physical Properties

|  |   |
|--|---|
| Dimensions   | 18.5" x 18.5" x 0.375"  |
| Thickness  | 0.375"  |
| Effective Coverage   | 2.38 square feet per tile   |
| Weight   | 5.2 lbs per tile  |
| Reference Specification<br>ASTM F-1700   | Conforms  |
| Critical Radiant Flux<br>ASTM E-648  | > 1.0 W/cm <sup>2</sup><br>Meets Class I Fire Rating              |
| Smoke Density<br>ASTM E-662  | ≤ 450   |
| Chemical Resistance<br>ASTM F-925  | Excellent resistance to<br>Acids, Alkalis, Household<br>Chemicals |
| Recycled Content  | 50%   |

## Solvent/Stain Resistance

FreeStyle™ has been tested for solvent/stain resistance per ASTM F-925-96 against a number of fluids, such as oils, acids, solvents, and staining agents.

SelecTech has pioneered advanced, state-of-the-art solutions to produce environmentally-friendly, high-performance commercial products. As the first U.S. company to produce such products from hard-to-recycle scrap plastic, SelecTech uses its patented technologies and proprietary process to solve environmental waste problems that other companies can't.

