

FreeStyle Flooring Specifcations

CONSTRUCTION

Dimensions (finished surface)	18.5" x 18.5" 47.0 cm x 47.0 cm
Coverage	2.38 sq ft/tile 0.22 sq meter/tile
Thickness	0.34" 8.6 mm
Commercial Wear Surface	<ul style="list-style-type: none">• 80 mil (2mm) Homogenous PVC• No Wax Urethane Wear Coat
Weight	5.1 lbs/tile

PERFORMANCE CHARACTERISTICS

Noise Reduction	Excellent
Underfoot Comfort	Superior
Stain Resistance	Excellent
Maintenance	No Wax
Made in USA	
Warranty	5-Year Commercial

LEED Use of FreeStyle flooring can contribute to points in Materials and Resources, Regional Materials, Indoor Environmental Quality, and Innovation Credit categories. For more details, see LEED insert or visit www.freestyleflooring.com.

Architectural Specifications

Go to www.freestyleflooring.com for complete CSI-format Architectural Specifications.

Installation All SelecTech flooring products are interlocking floor tiles. FreeStyle tiles are 18.5" x 18.5" or 2.38 square feet (47.0 cm x 47.0 cm or 0.22 square meters) per tile. Due to the large tile size, use a waste/contingency factor of between 3% and 5% when estimating a job. A plastic deadblow mallet should be used for joining tiles. Use of a vinyl tile cutting tool or saw is required for cutting around obstacles. All SelecTech flooring products are free-lay systems that do not require adhesives and may be installed over concrete, wood, asbestos tile, rubber, vinyl composite tiles and other standard floors. A 1/4" (6.35 mm) gap around the perimeter should be left to allow for expansion and contraction. See FreeStyle Installation Guides or go to www.freestyleflooring.com for additional instructions.

Maintenance SelecTech flooring products can be cleaned with neutral or other readily available cleaners using a mop or sponge or with a power scrubber or buffer equipped with a white pad. See FreeStyle Maintenance Guide or go to www.freestyleflooring.com for additional instructions.

Warranties SelecTech flooring products are backed by a 5-year limited warranty against wear and a one-year warranty against manufacturing defects. *Unlike many other flooring products, warranties on SelecTech flooring products are NOT VOIDED because of problems caused by moisture and hydrostatic pressure in the subfloor; or by buyer's failure to use manufacturer's specified adhesive.* See www.freestyleflooring.com for warranty details.

PHYSICAL PROPERTIES

Abrasion Resistance	<0.01 gram weight loss ASTM D-3389
Coefficient of Friction	0.70
Conforms to ADA Recommendations	ASTM D-2047
Critical Radiant Flux	>0.45 watts/cm ²
Meets Class I Fire Rating	ASTM E-648
Smoke Density	≤450 ASTM E-662
Static Load Resistance	550 psi ASTM F-970

ENVIRONMENTAL QUALITY

Recycled Content	70% (min. 50% post-consumer)
Air Quality Meets Requirement for LEED IEQ 4.3	CA Prop. 1350 IEQ Protocol
Quality System	ISO 9001

FreeStyle BioLock™

High Performance Homogeneous Floating Flooring Designed for Healthcare, Education, and Lab Environments

FreeStyle BioLock™ Is Ideal for Commercial Environments

- Healthcare
- Laboratories
- Education
- Retail Stores

Water-Proof Seam Sealer Makes Tiles 100% Liquid-Tight, but Still Removable

- 100% Liquid Tight AND Reusable
- Approved for Use in Pharmaceutical Labs Over Access Floors
- Tiles Can be Removed and Reused

Enhanced Comfort and Sound Reduction

- Patented Backing System
- Superior Comfort-Under-Foot
- Enhanced Ergonomics
- Excellent Sound Reduction

Patented Glueless “Zipper” Interlock

FreeStyle BioLock™ manufactured by SelecTech is easy to install without the need for messy adhesives or extensive subfloor preparation, saving time and money

Lower Installed Cost

- Minimal Subfloor Preparation
- Installs Over Existing Flooring
- Not Affected by High MVER or pH
- Significantly Reduces Downtime

Fully Sustainable

- Made with 70% Recycled Content
- 100% Recyclable/ 100% Reusable
- Meets CA 1350 Indoor Air Quality Protocol
- Made in USA

Low Maintenance

- Commercial Grade
- Urethane, No-Wax Finish



LEED™


by SelecTech

Made in USA

www.freestyleflooring.com

FreeStyle BioLock™

Patented Interlocking System

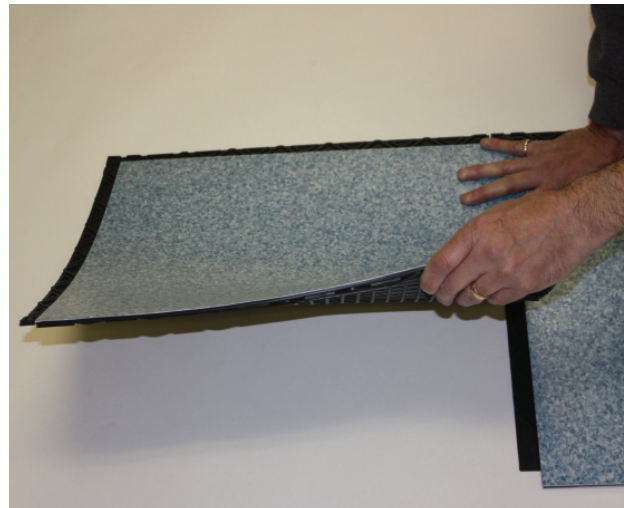


PLACE FreeStyle



LOCK SEAM using a simple mallet


No adhesive... No special tools... No special skills

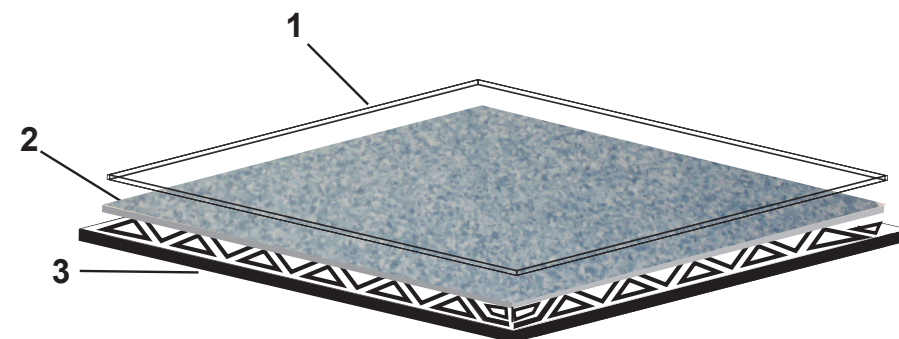


1. Urethane/No-Wax Finish
2. Homogenous, Durable, Color-Through Vinyl
3. Patented Recycled Composite Underlayment with Interlocking Tabs

www.freestyleflooring.com
1-877-738-4537

Stock Colors




c201




c206




c207



c208



c210




c211


Non-Stocking Colors (5,000 sq. ft. minimum, 8 to 10 week lead time)




b601




b602




b603




b604




b605




b606




b607




b608




b609




b610




b611




b612




c202




c203




c204



c205




c209




c212



d101




d102



d103



d104



d105



d106




d107




d108




d109



d110



d111



d112

Note - Due to variations in printing, colors may vary slightly from actual samples