

CONSTRUCTION

Dimensions: (finished surface)	18.5" x 18.5" 47.0 cm x 47.0 cm
Coverage:	2.38 sq ft/tile 0.22 sq meter/tile
Thickness:	0.34" 7.9 mm
Commercial Wear Surface:	20 mil (0.5mm) PVC Ceramic/Urethane Wear Coat
Weight:	5.0 lbs/tile

PERFORMANCE CHARACTERISTICS

Noise Reduction	Excellent
Underfoot Comfort	Superior
Stain Resistance	Excellent
Maintenance	No Wax
Made in USA	
Warranty	10-Year Commercial

PHYSICAL PROPERTIES

Abrasion Resistance:	<0.01 gram weight loss ASTM D-3389
Coefficient of Friction: Conforms to ADA Recommendations	0.70 ASTM D-2047
Critical Radiant Flux: Meets Class I Fire Rating	>0.45 watts/cm ² ASTM E-648
Smoke Density:	<450 ASTM E-662
Static Load Resistance:	500 psi ASTM F-970

ENVIRONMENTAL QUALITY

Recycled Content:	70%
Air Quality: Meets LEED IEQ 4.3 Requirement	CA Prop. 1350 IEQ Protocol
Quality System:	ISO 9001

LEED

Use of FreeStyle Flooring can contribute to points in Materials and Resources, Indoor Environmental Quality, and Innovation Credit categories. For more details, see LEED Insert or visit www.FreeStyleFlooring.com

ARCHITECTURAL SPECIFICATIONS - Short Form

Go to www.FreeStyleFlooring.com for complete CSI-format Architectural Specifications.

All floors as indicated in the Finish Schedule or listed in this specification shall be **FreeStyle Vinyl Floor Tile**, manufactured by **SelecTech, Inc.**, Avon, MA, style code (insert style code). Tiles shall be made from at least 50% recycled materials. The product shall be an interlocking floor tile and be available in 18.5" x 18.5" (47.0 cm x 47.0 cm) squares (nominal) and with a thickness of 0.34 inches (9.53 mm). The product shall offer a 10-Year Limited Warranty against wear as detailed in the **FreeStyle Warranty Brochure**. Tiles shall be installed as a free-lay product without adhesives. Installatnon shall be recommended in the **FreeStyle Installation Guide**.

Installation All SelecTech flooring products are interlocking floor tiles. FreeStyle tiles are 18.50" or x r8.50" or 2.38 square feet (47.0 cm x 47.0 cm or 0.22 square meters) per tile. Due to the large size, use a waste/contingency factor of between 3% and 5% when estimating a job. A plastic deadblow mallet should be used for joining tiles. Use of a vinyl tile cutting tool or saw is required for cutting around obstacles. All **SelecTech** flooring products are free-lay systems that do not require adhesives and may be installed over concrete, wood, asbestos tile, rubber, vinyl composite tiles and other standard floors. A 1/4" (6.35 mm) gap around the perimeter should be left to allow for expansion and contraction. See **FreeStyle** or **SelecTile Installation Guide** or go to www.FreeStyleFlooring.com for additional instructions.

Maintenance SelecTech flooring products can be cleaned with neutral or other readily available cleaners using a mop or sponge or with a power scrubber or buffer equipped with a white pad. See FreeStyle Maintenance Guide or go to www.FreeStyleFlooring.com for additional instructions.

Warranties SelecTech flooring products are backed by a 10-Year Limited Warranty against wear and a one-year warranty against manufacturing defects. Unlike many other flooring products, warranties on SelecTech flooring products are **NOT VOIDED** because of problems caused by moisture and hydrostatic pressure in the subfloor ; or by buyer's failure to use manufacturer's specified adhesives. See www.FreeStyleFlooring.com for warranty details.

FreeStyle Flooring Manufactured by SelecTech, Inc.
See our other Interlocking flooring product lines.

StaticStop Static Control Flooring - www.StaticStop.com
Place N' Go Residential Flooring - www.PlaceNGo.com

COMMERCIAL INTERLOCKING FLOORING SYSTEM



PATENTED, GLUELESS, "ZIPPER" INTERLOCK

Floating Floor Installs Without Adhesives. Maintains Excellent Seam Appearance for the Life of the Product.

LOWER INSTALLED COST THAN GLUE-DOWN FLOORING

Minimal Subfloor Preparation. Installs Over Existing Flooring.

BUILT IN FLEXIBLE UNDERLAYMENT

Provides Unparalleled Comfort Under Foot.

FULLY SUSTAINABLE

Made with 70% Recycled Content. 100% Recyclable Back Into New FreeStyle.

DESIGNED FOR COMMERCIAL APPLICATIONS

Excellent Stain Resistance. No Wax, Easy Maintenance.

100% WATERPROOF

Can Be Installed Over High Moisture Subfloors.




www.FreeStyleFlooring.com

www.FreeStyleFlooring.com

STONES

PATENTED INTERLOCKING SYSTEM

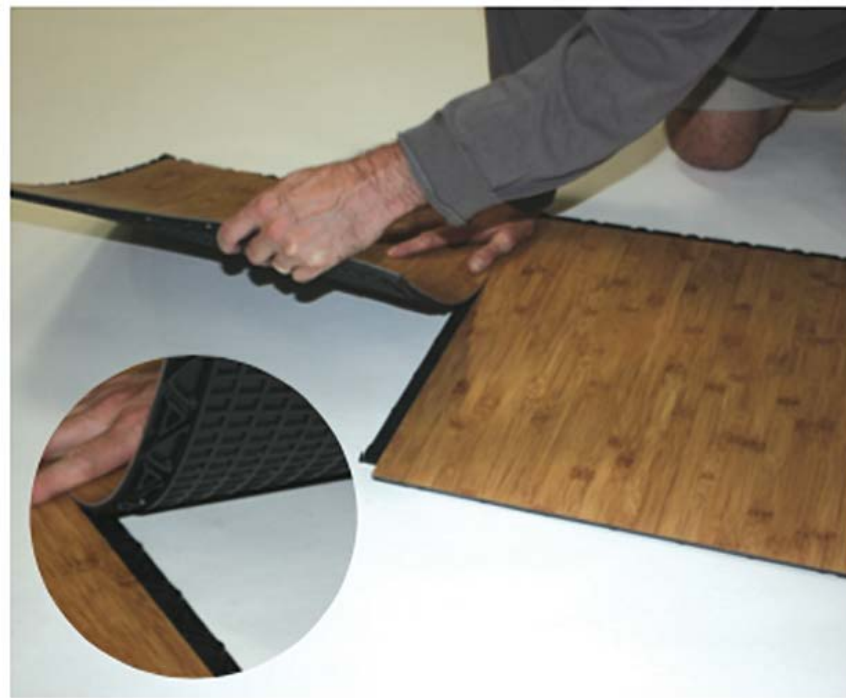


PLACE Freestyle



LOCK SEAM using a simple mallet

No Adhesive. No Special Tools. No Special Skills.

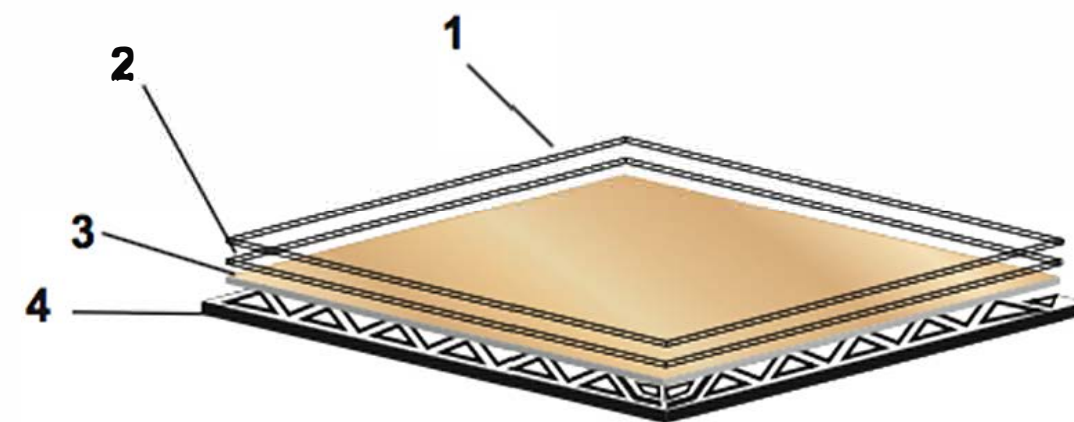

1. Urethane/No-Wax Finish
2. Clear Commercial Wear Layer
3. Decorative Print Film Layer
4. Recycled Composite Underlayment with Interlocking Tabs



SONORAN



MOHAVE



SAHARA STONE



NEW ENGLAND SLATE



ATLANTIC SLATE




COPPER



GREYSTONE

WOODS

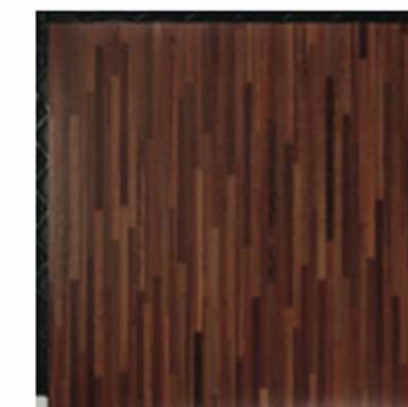

CHERRY BLOCK



WALNUT BLOCK



CORK



BAMBOO

Colors in images will vary from monitor to monitor.
If color is critical we highly recommend ordering a sample.
***All wood grains are available in straight-grain or parquet styles.
Specify "parquet" when ordering to receive tiles for parquet installation.***